


## KY TYPE 1527

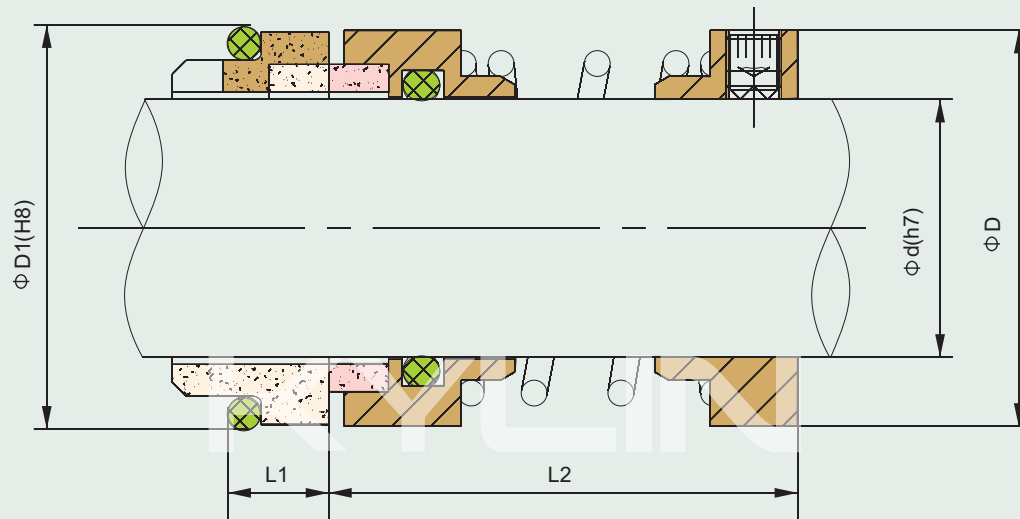

### Working Conditions

- Mediums: Water, oil, acid, alkali, etc.
- Temperature:  $-20^{\circ}\text{C}\sim 180^{\circ}\text{C}$
- Pressure:  $\leq 1.0\text{MPa}$
- Speed:  $\leq 10\text{ m/Sec}$

### Compatibility:

- SEALOL TYPE 1527



### Combined Materials

- Stationary Ring (Carbon/Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton/Silica Gel)
- Spring and Metal Part (Steel)

Part#	d	D	D1	L1	L2
KY TYPE 1527-18	18	32	33	10	35
KY TYPE 1527-20	20	34	35	10	35
KY TYPE 1527-22	22	36	37	10	35
KY TYPE 1527-24	24	38	39	10	40
KY TYPE 1527-25	25	39	40	10	40
KY TYPE 1527-28	28	42	43	10	40
KY TYPE 1527-30	30	44	45	10	40
KY TYPE 1527-32	32	46	48	10	45
KY TYPE 1527-33	33	47	48	10	45
KY TYPE 1527-35	35	49	50	10	45
KY TYPE 1527-38	38	54	56	11	44
KY TYPE 1527-40	40	56	58	11	44
KY TYPE 1527-43	43	59	61	11	49
KY TYPE 1527-45	45	61	63	11	49
KY TYPE 1527-48	48	64	66	11	49
KY TYPE 1527-50	50	66	70	13	47
KY TYPE 1527-53	53	69	73	13	57
KY TYPE 1527-55	55	71	75	13	57
KY TYPE 1527-58	58	78	78	13	57
KY TYPE 1527-60	60	80	80	13	57
KY TYPE 1527-63	63	83	83	13	57
KY TYPE 1527-65	65	85	85	13	67
KY TYPE 1527-68	68	88	90	15.3	64.7
KY TYPE 1527-70	70	90	92	15.3	64.7
KY TYPE 1527-75	75	99	97	15.3	64.7
KY TYPE 1527-80	80	104	105	15.7	74.3
KY TYPE 1527-85	85	109	110	15.7	74.3
KY TYPE 1527-90	90	114	115	15.7	74.3
KY TYPE 1527-95	95	119	120	15.7	74.3
KY TYPE 1527-100	100	124	125	15.7	74.3

## O Ring Mechanical Seals

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com